


6242B

OHLS® Flat Wiring Cable with Bare CPC. BS 7211. 300/500 V

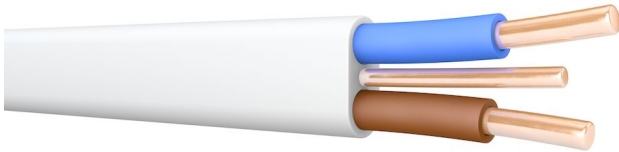

Draka 6242B is a flat twin core Zero Halogen, Low Smoke (OHLS®) cable designed for installation as clipped direct, on tray or in basket and also buried within plaster or embedded in walls

Two cores with bare CPC

KEY APPLICATIONS

Suitable for fixed installation in dry or damp premises on walls, boards or trays, in channels or embedded in plaster particularly for situations in which low emission smoke and acid gas is required in case of burning

FEATURES AND BENEFITS

- Zero Halogen, Low Smoke (OHLS®)
- Manufactured under ISO 9001 Quality management systems

STANDARDS



BS 7211

BS EN 60332-1-2

BS EN 61034-2

BS EN 60754-1

Construction Standard

Flame Propagation - Single Cable

Smoke emission

Corrosive and acid gas

CONSTRUCTION

Conductor material

Conductor surface

Core insulation material

Material outer sheath

Cable shape

Copper

Bare

XLPE

Low smoke zero halogen

Flat

APPLICATIONS PROPERTIES

Nominal voltage U ₀ [V]	300
Nominal voltage U [V]	500
Flame retardant	In accordance with BS EN 60332-1-2
Halogen free	Yes
Low smoke	Yes
Max. conductor temperature [°C]	90
Min. Operation temperature [°C]	-25
UV resistant	Yes
Min. Installation temperature [°C]	0
Max. Installation temperature [°C]	80
Bending radius (rule)	4D (Minor axis)

COLOURS

Insulation: Brown, Blue.

Alternatively, Brown, Brown (for 2x1.0 and 2x1.5 only)

Sheath:White

CURRENT RATINGS

Refer to table 4E2 of BS 7671 Requirements for Electrical Installations. IET Wiring Regulations

Note: Where a conductor operates at a temperature exceeding 70°C it shall be ascertained that the equipment connected to the conductor is suitable for the conductor operating temperature

TECHNICAL DATA

Number of cores	Nominal cross section conductor [mm ²]	Conductor category	Nominal cross section of protective conductor [mm ²]	Cable height approx. [mm]	Cable width approx. [mm]	Cable weight [kg/km]	Conductor resistance at 20° C [Ohm/km]
2	1.5	Class 1 = solid	1	4.7	8.6	73	12.1
2	2.5	Class 1 = solid	1.5	5.3	9.9	110	7.41
2	4	Class 2 = stranded	1.5	6.1	11.4	145	4.61
2	6	Class 2 = stranded	2.5	6.8	13.1	205	3.08
2	10	Class 2 = stranded	4	8.4	16.8	310	1.83
2	16	Class 2 = stranded	6	9.6	19.5	465	1.15